


Details

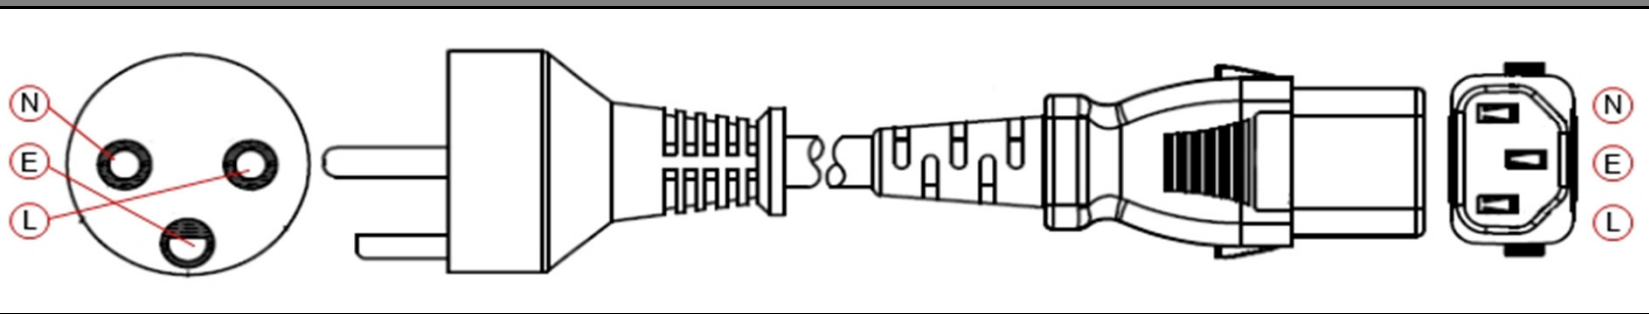


Side A		Wire	Side B
1 Plug		1 Conductors	1 Connector
- Type: DK 2-5a (AFSNIT 107-2-D1)		- Type: H05VV-F 3x 1.00mm ²	- Type: IEC C13, Lockable
- Contacts: N (Neutral) E (Earth) L (Life)		- Wires: Blue(N = Neutral) Yellow/Green (E = Earth) Brown (L = Life)	- Contacts: L (Life) E (Earth) N (Neutral)
- Gender: Male			- Gender: Female
2 Housing		2 Jacket	2 Housing
- Material: PVC, Molded		- Material: PVC	- Material: Plastic
- Orientation: Straight (180°)		- Color: Black	- Orientation: Ultrasonic welded Straight (180°)
- Color: Black			- Color: Black
3 Ratings			3 Ratings
Current: 10A (max.)			Current: 10A (max.)
Voltage: 250V (max.)			Voltage: 250V (max.)

Wiring diagram

Side A	Side B	Color
N	N	Blue
E	E	Yellow/Green
L	L	Brown

Approvals

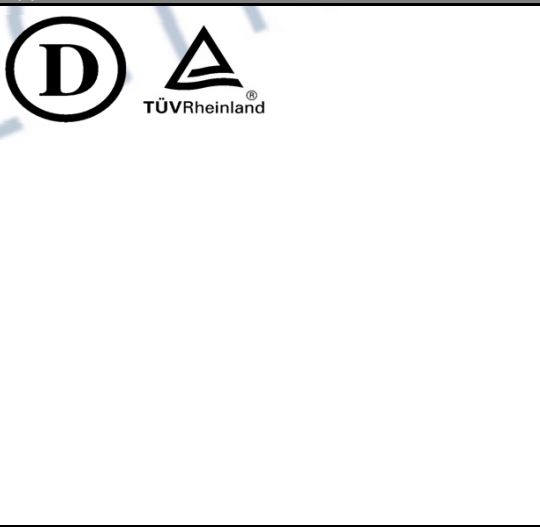

Part number	Description
S12A-045-03008	Power Cord, Denmark - C13 Lock, 3x 1.00mm ² , Black, 2.5m

