


DVI-I Duallink (24+5) Cable Black

Details

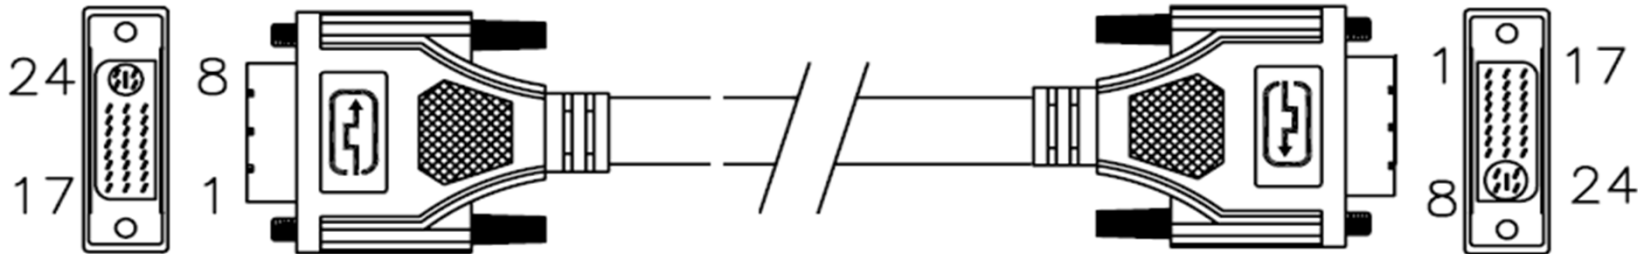

Side A	Cable	Side B
1 Connector - Contacts: 29x, (24+5) Gold plated 30U" - Housing: Metal Nickel Plated - Gender: Male	1 Conductors - Pairs: 7x, AWG28 + Alu/Mylar foil + Drainwire - Single: 1x, AWG28 - Single: 3x, AWG28 - Coax: 3x, AWG28	1 Connector - Contacts: 29x, (24+5) Gold plated 30U" - Housing: Metal Nickel Plated - Gender: Male
2 Hood - Internal: Metal can - External: PVC Molded - Locking: Thumbscrews #4-40 - Color: Black	2 Outer Sheath - Screening: Metal braid Alu/Mylar foil + Drainwire - Material: PVC - Color: Black	2 Hood - Internal: Metal can - External: PVC Molded - Locking: Thumbscrews #4-40 - Color: Black
	3 Dimentions - Diameter: Ø 8.6mm	
	4 UL Listing - Number: UL20276	

Part number	Description	Image
S02A-000-06104	DVI Cable Duallink 24+5 Black 2m	
S02A-000-06108	DVI Cable Duallink 24+5 Black 3m	
S02A-000-06112	DVI Cable Duallink 24+5 Black 5m	

Wiring diagram

Side A	Side B	Color
C1	C1	Coax Red
C5	C5	Ground
C2	C2	Coax Blue
C5	C5	Ground
C3	C3	Coax Green
C5	C5	Ground
8	8	Green
15	15	White
C4	C4	Yellow
15	15	Orange
1	1	Black
2	2	White
3	3	Ground
4	4	Brown
5	5	White
3	3	Ground
6	6	Purple
7	7	White
10	10	Red
9	9	White
11	11	Ground
12	12	Orange
13	13	White
11	11	Ground
14	14	Orange
16	16	Red
17	17	Yellow
18	18	White
19	19	Ground
20	20	Green
21	21	White
19	19	Ground
23	23	Blue
24	24	White
22	22	Ground
S	S	Ground